

FIG 1

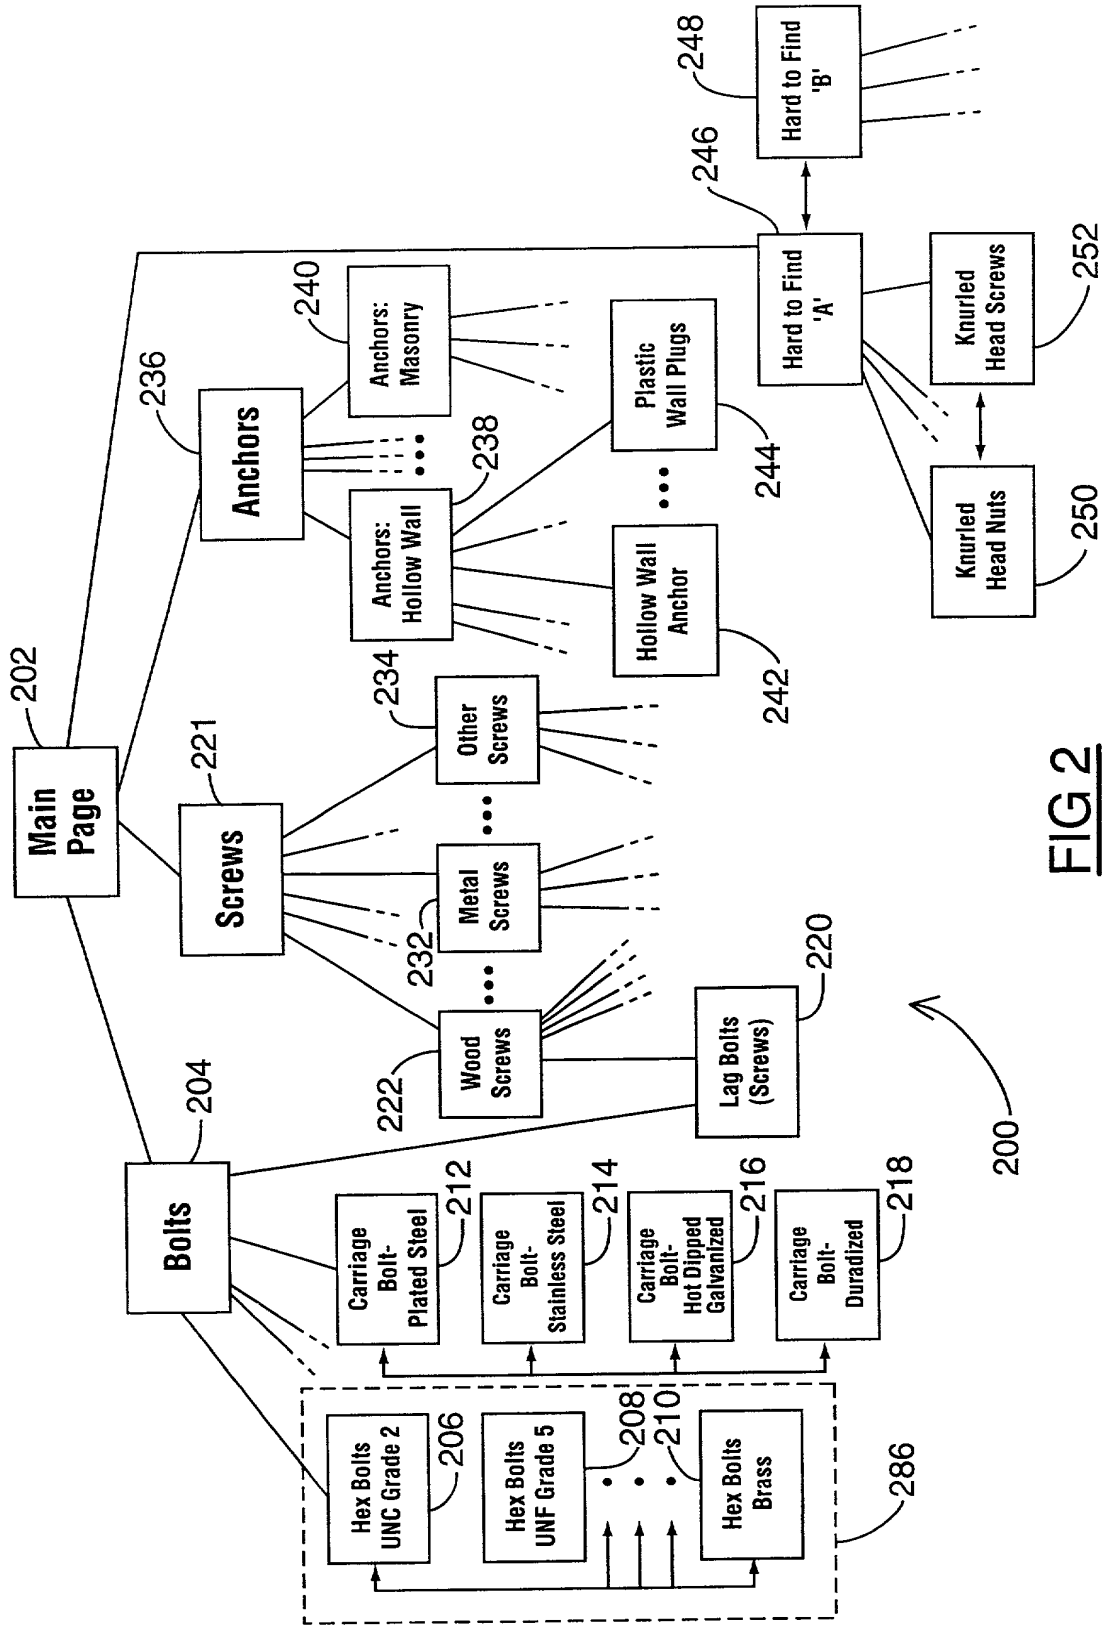


FIG 2


202

203

THE FASTENER FINDER™

Just touch any of the fasteners!

260



Bolts



Screws

264




Knock Down Furniture




Clips, Pins, Keys




Rings & Plugs




Washers




Nuts




Automotive




Wall Anchors



Rods & Shapes



Picture, Mirror Household Hooks



Hard-to-Find Fasteners

268


266


FIG 3

Bolts Main Page

HOME

280

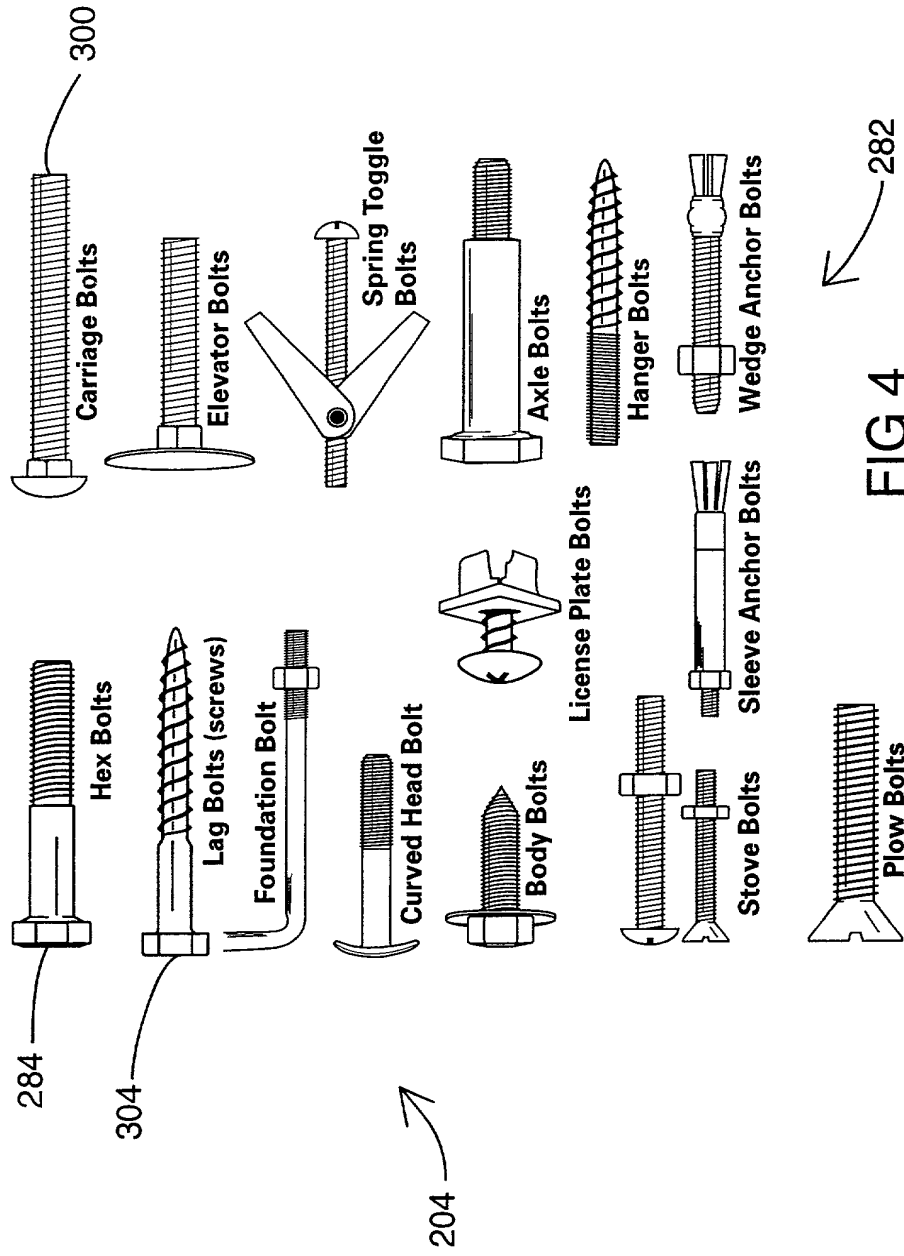

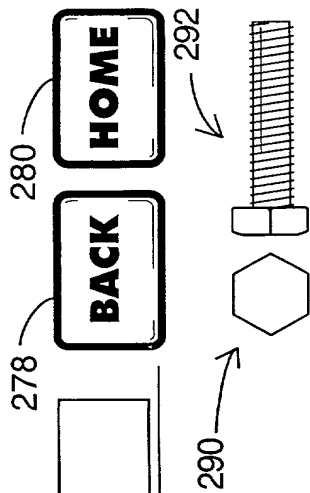


Hex Bolts: UNC Grade 2

Hex Bolts: UNC Grade 2

UNC: Unified National Coarse Thread
Regular strength for everyday use.

Made from low carbon steel. No radial bar head marking.

Tensile Strength: up to 5/8" - 64,000 p.s.i. (min) 3/4" diameter up to 55,000 p.s.i. (min)



Minimum thread length formula:		Wrench sizes for Hex Heads									
Bolts 6" or shorter - 2x diameter + 1/4"	Bolt dia.	1/4	5/16	3/8	7/16	1/2	9/16	3/8	3/4		
Bolts longer than 6" - 2x diameter + 1/2"	Wrench Size	7/16	1/2	9/16	5/8	3/4	7/16	15/16	1 1/8		

*Note Actual thread length may be longer

You will find them in...

SECTION B

BIN COLOR

Yellow

282

287

284

285

UNC Grade 2

UNC Grade 5

UNC Grade 8

Stainless Steel

Brass

Metric Coarse

Metric Fine

Metric X-Fine

294

296

286

FIG 5

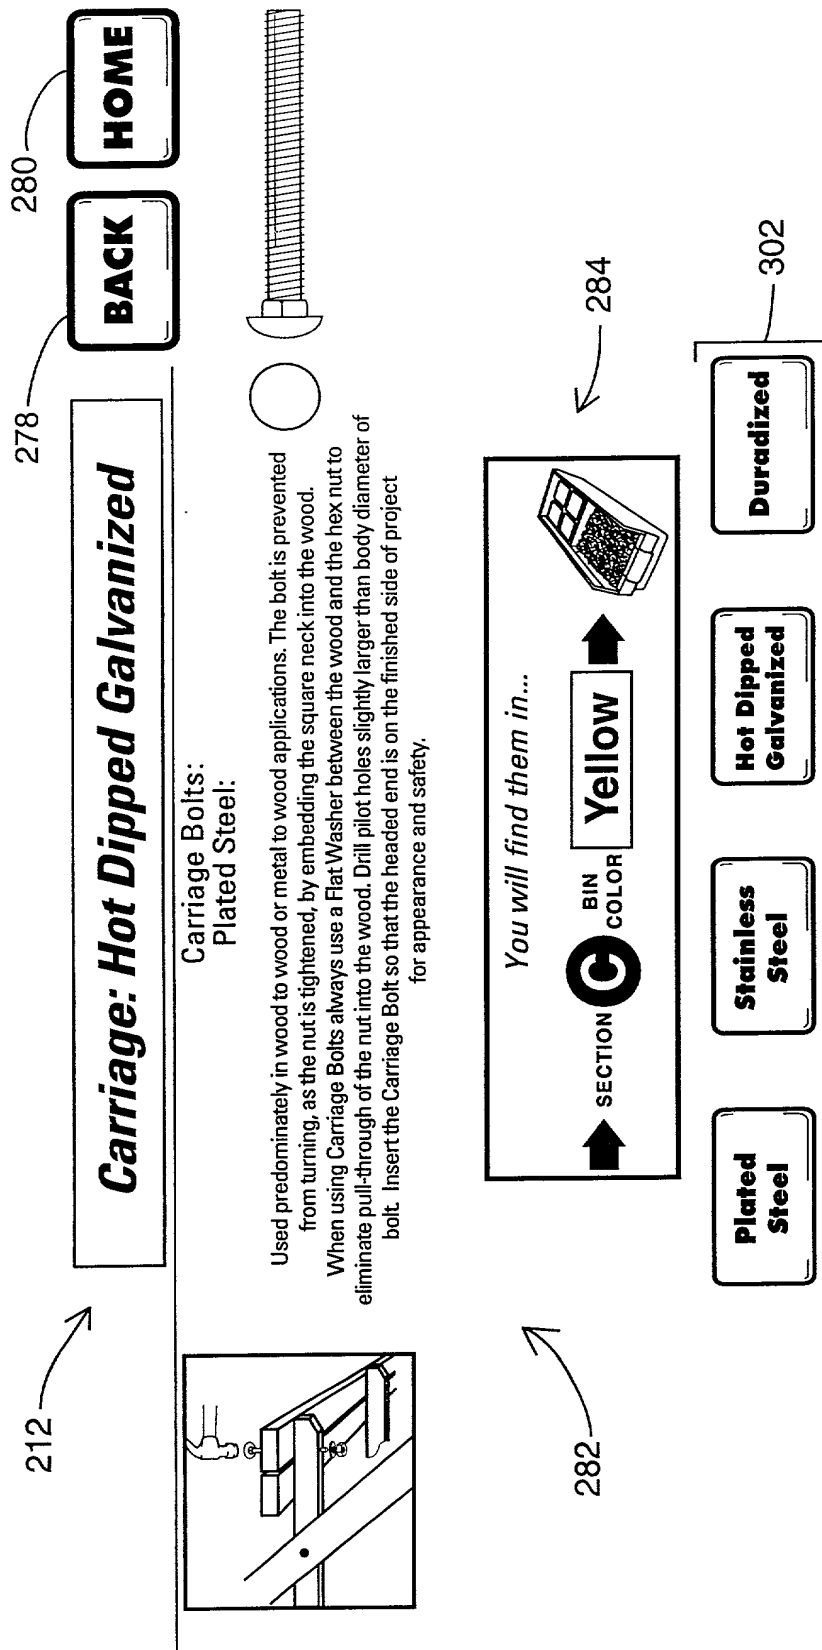


FIG 6

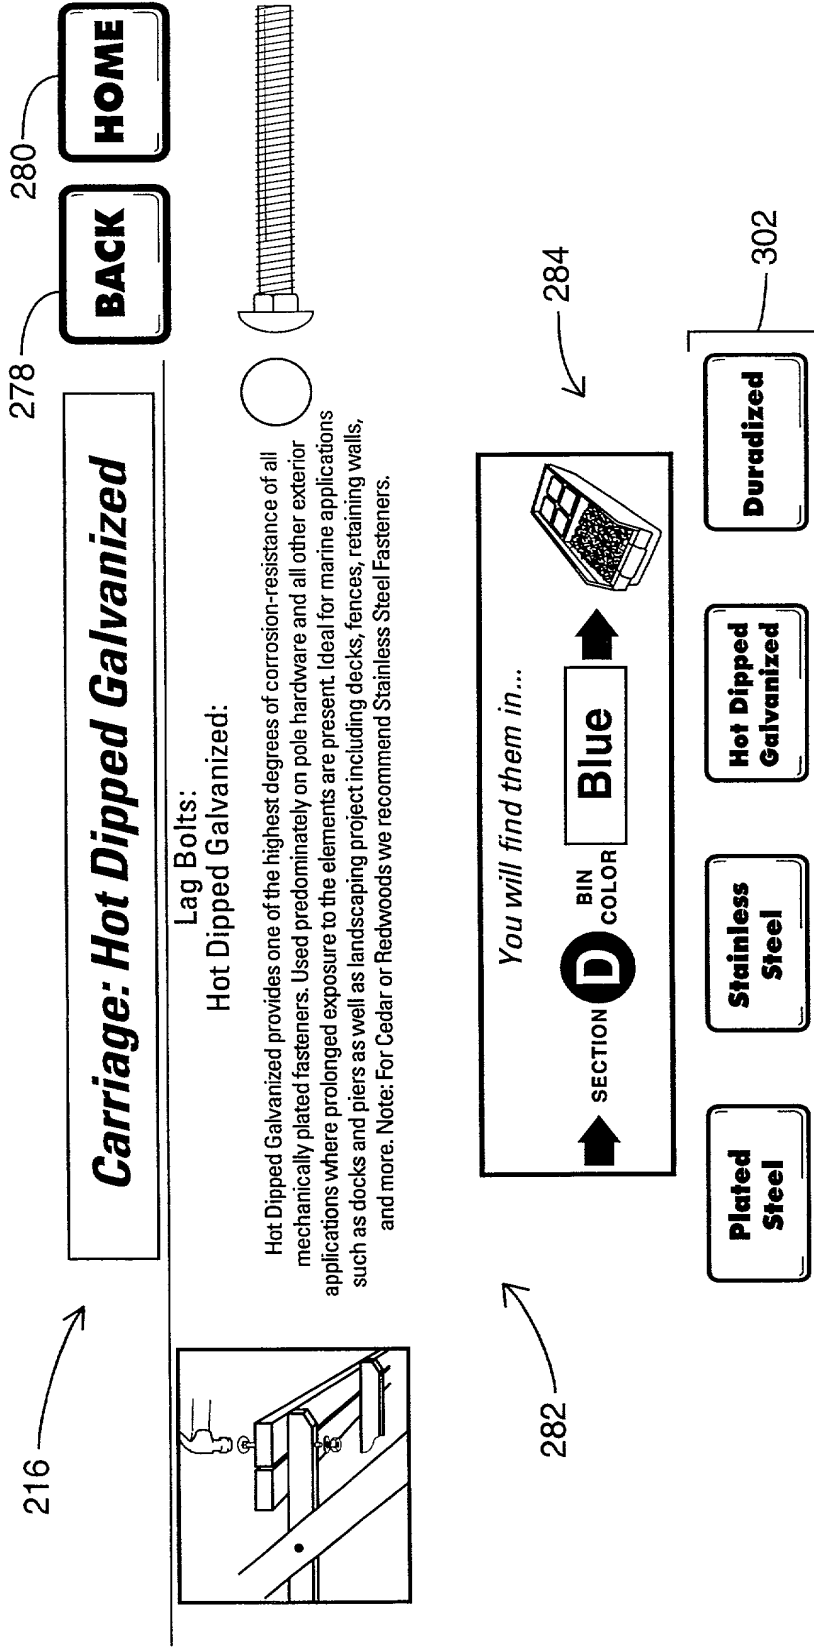


FIG 7

222


280

Screws for Wood

HOME


Please touch any of the fasteners below... or a different category button

WOOD SCREWS




Phillips Square

Square Square




Round Brass

Slot Brass




Round Brass



Round Washer

Flat Square


PARTICLE BOARD




Lag Bolt (screws)



Threaded Inserts



Cross Dowel




Acoustic Lag Screw

Drywall Screws



Dowel Screw




Hanger Bolt

Gold

Stainless

EXTERIOR SCREWS

Flat Square FLOOR SCREWS



Joint Connector Bolt

Joint Connector Screws

Confirmat Connector Screw

FIG 8

Screws for Metal

Allen Head Screws

Square Drive 'LOXXON' Screws

Furniture & Cabinet Screws

Other Screws

238

280

Bolts Main Page

HOME

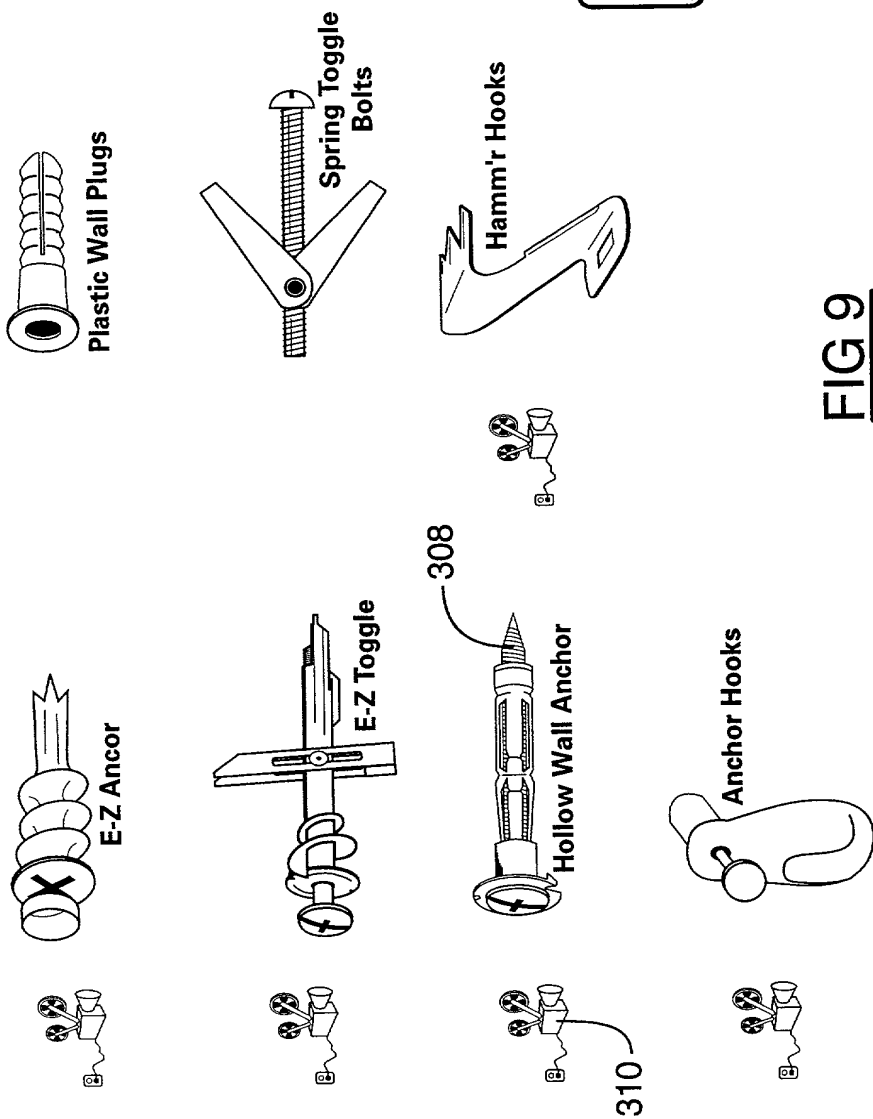


FIG 9





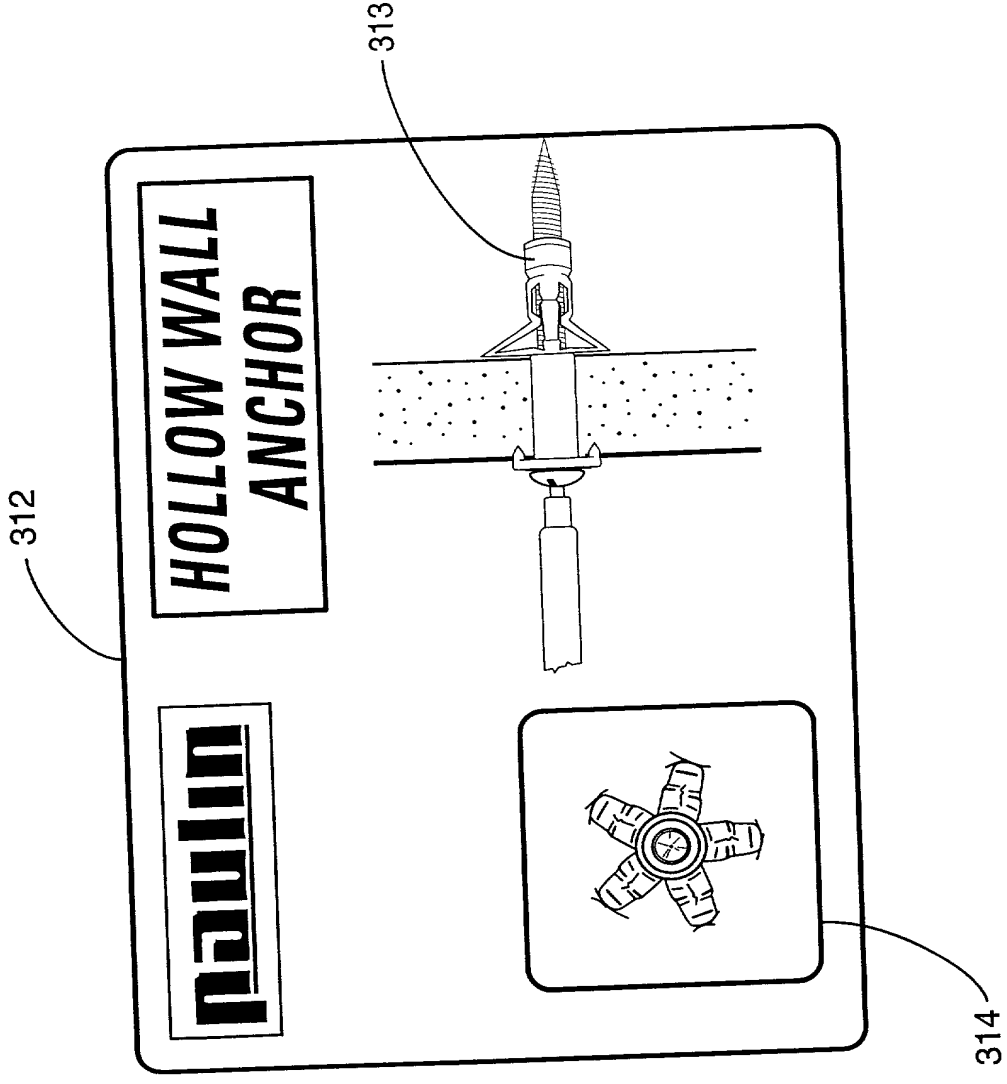


FIG 10

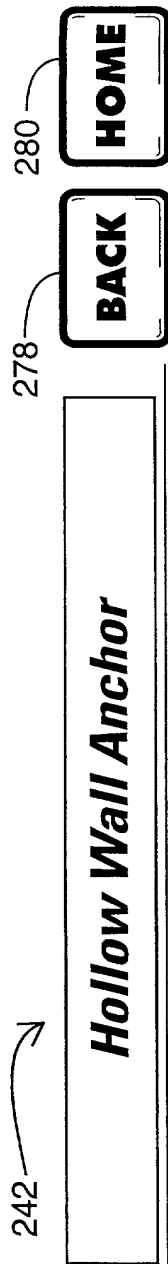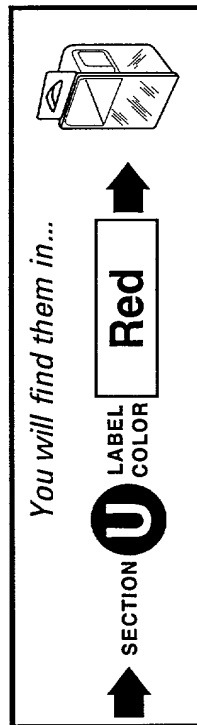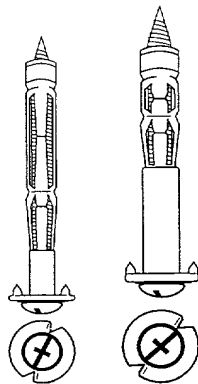

Hollow Wall Anchor


Hollow Wall Anchors or "Molly" anchors are designed to expand and grip as the screw is tightened in drywall or other hollow wall applications. These anchors are available in various wall thicknesses, therefore check size designation on the package. Once installed screw may be removed and re-installed as often as required. For drill type anchors, drill hole size slightly larger than anchor and install. For hammer-in type, simply install by tapping in with a hammer.

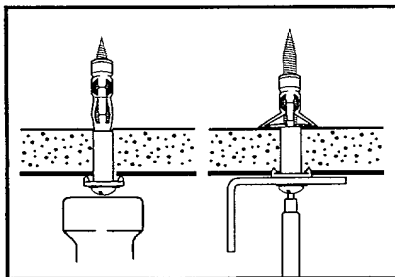


282



284

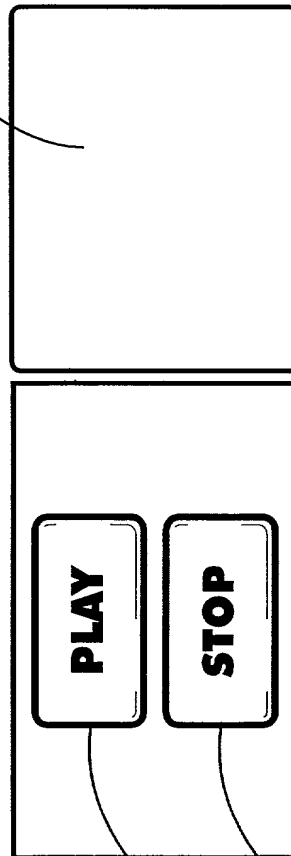

Installation Video Demonstration



316

318

FIG 11

246

Hard to Find Items

280

HOME

PART
'A'

PART
'B'

326


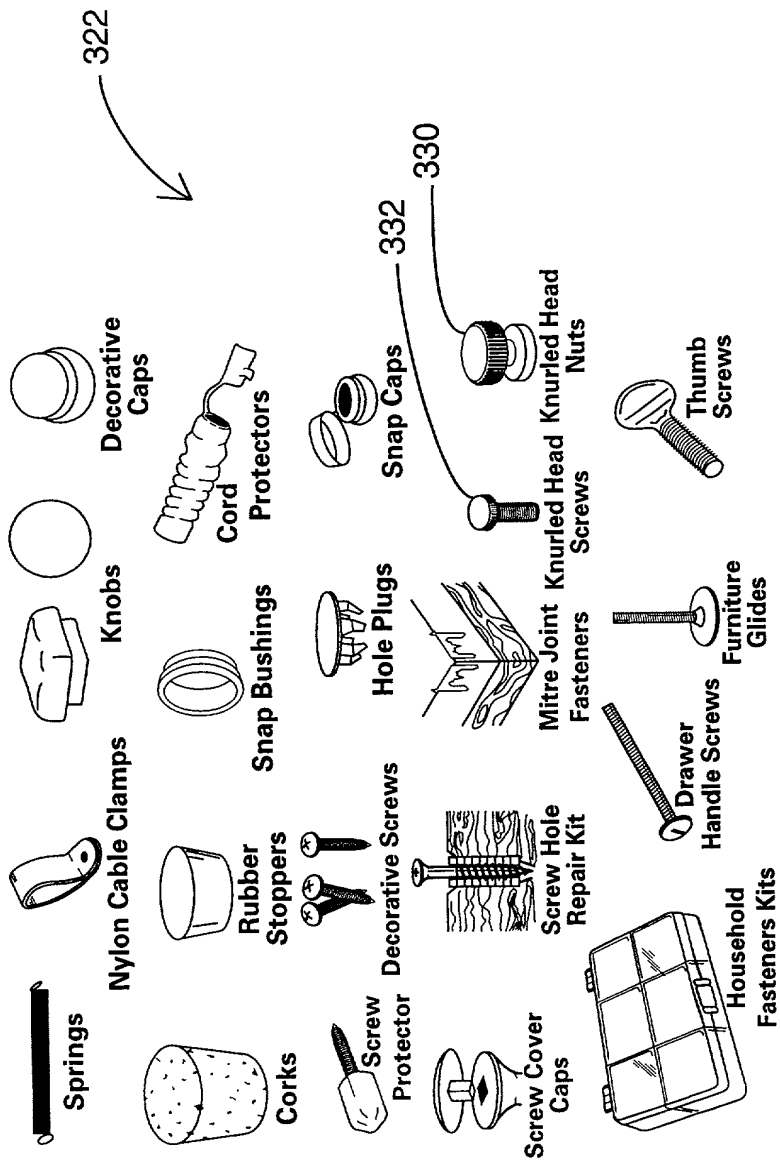


FIG 12

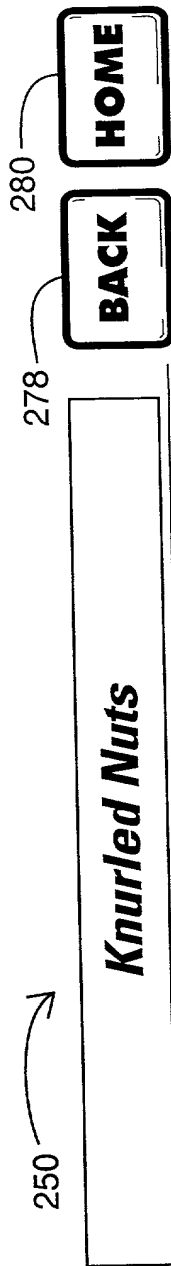

Knurled Nuts

Knurled Brass Nuts are used to attach diffuser shields on square recessed lighting fixtures found throughout many homes, recreation rooms, bathrooms and mobile homes. Knurled Nuts are also found on many electrical fixtures where the threaded stud is anchored in the junction box and the fixture is mounted over and through the studs. Knurled Nuts are hollow allowing adjustment anywhere along the tread of the stud.




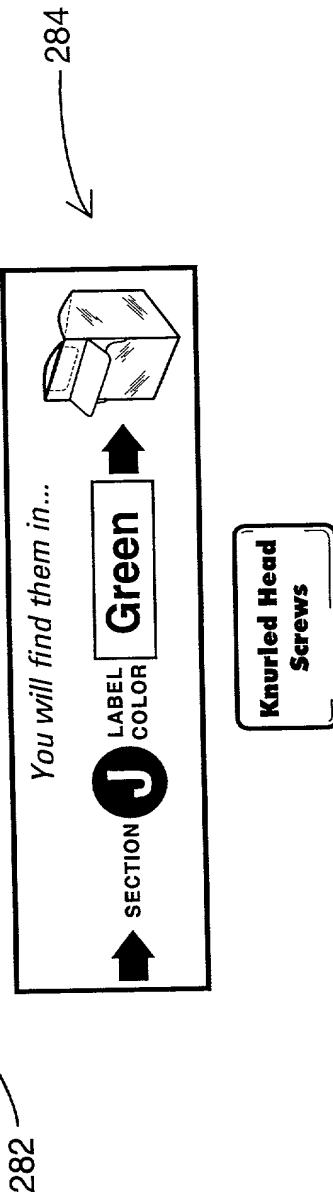


FIG 13

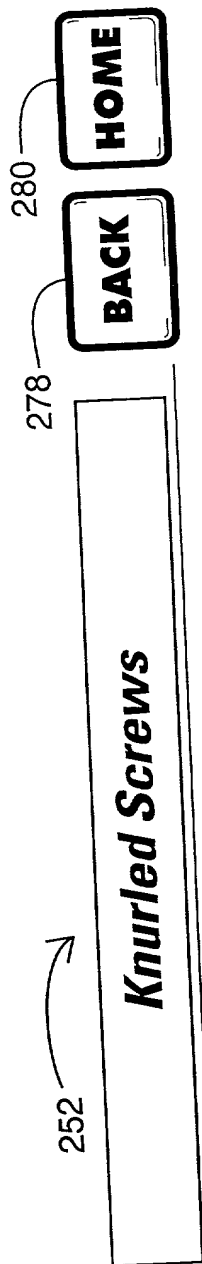

Knurled Screws

Knurled Head Screws are available in either Brass or Chrome Plate Steel in various lengths. These screws are used predominately for attaching glass globes to light fixtures on Ceiling Fans, Bathroom, Kitchen and Bedroom lights as well as exterior lights. Knurled screws are installed or removed using finger pressure and can be used as decorative adjustment screws on a variety of other products.

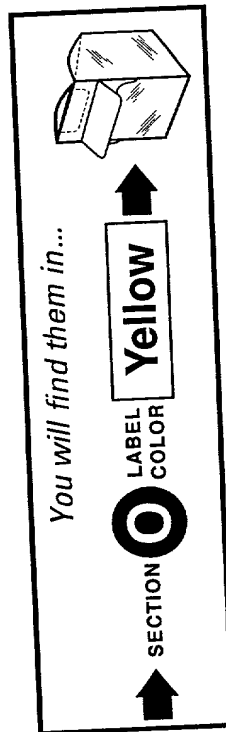
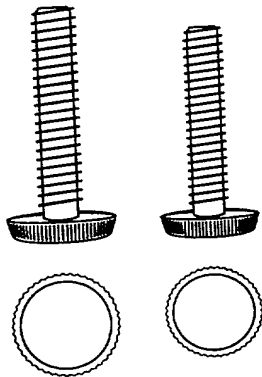
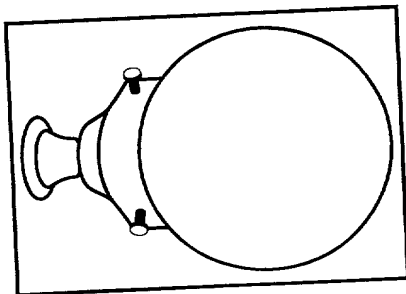


FIG 14

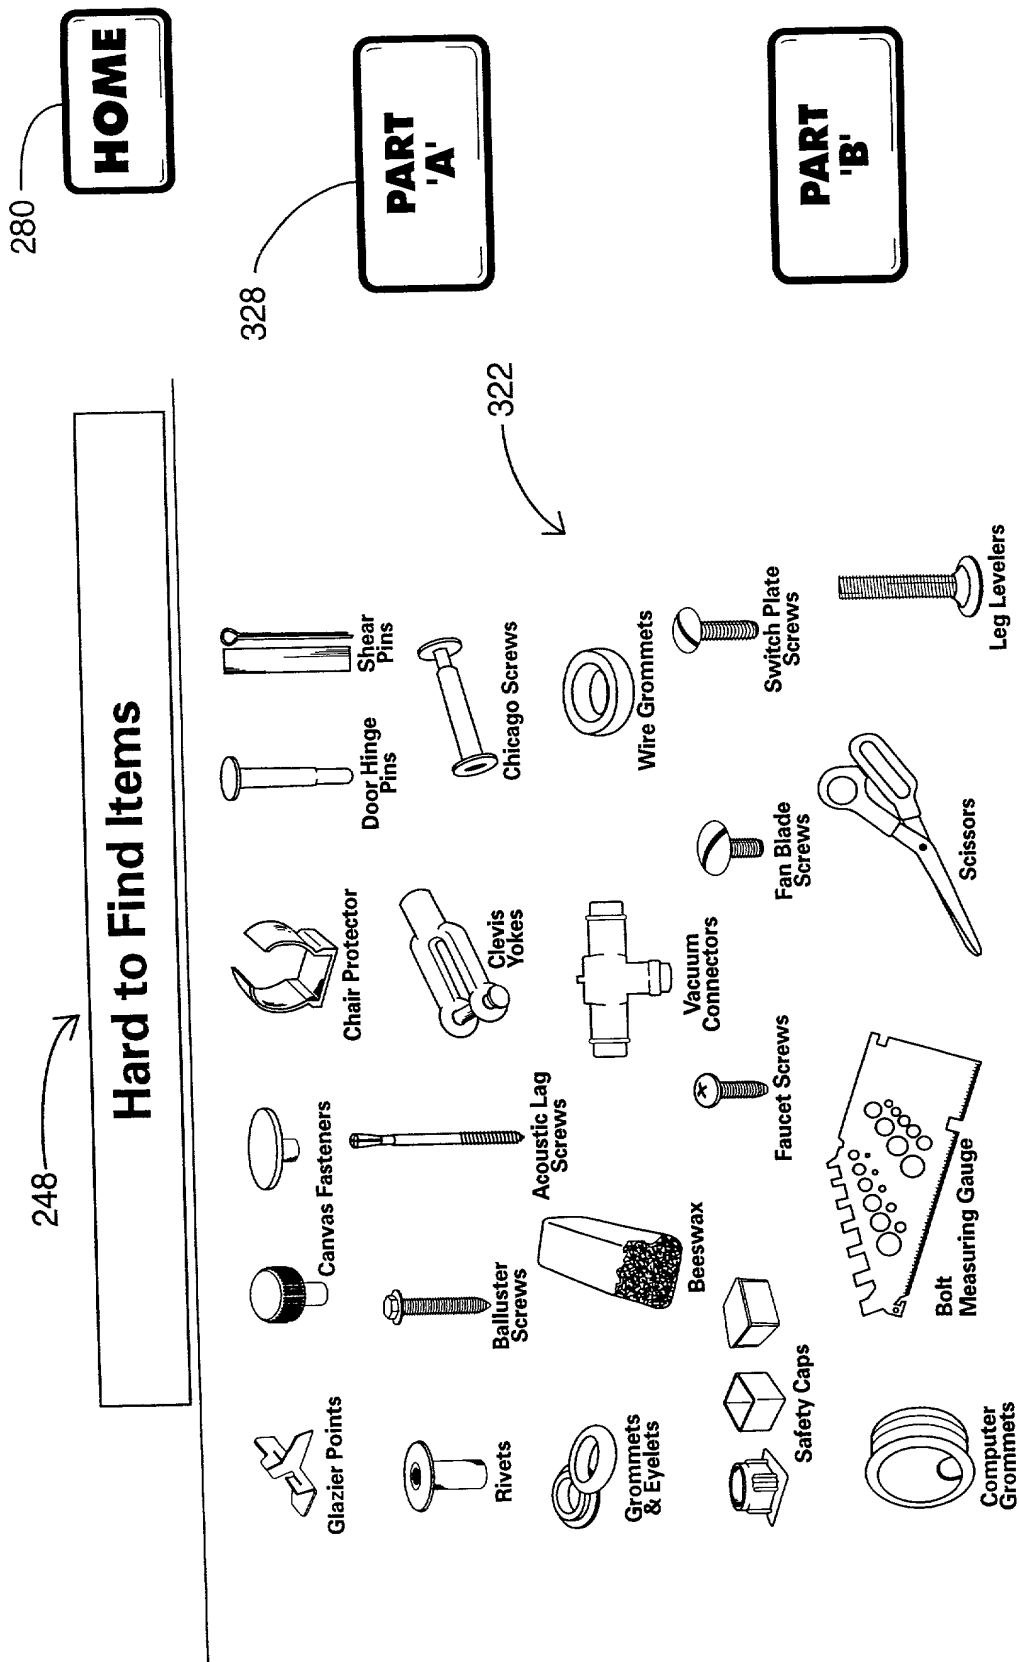


FIG 15

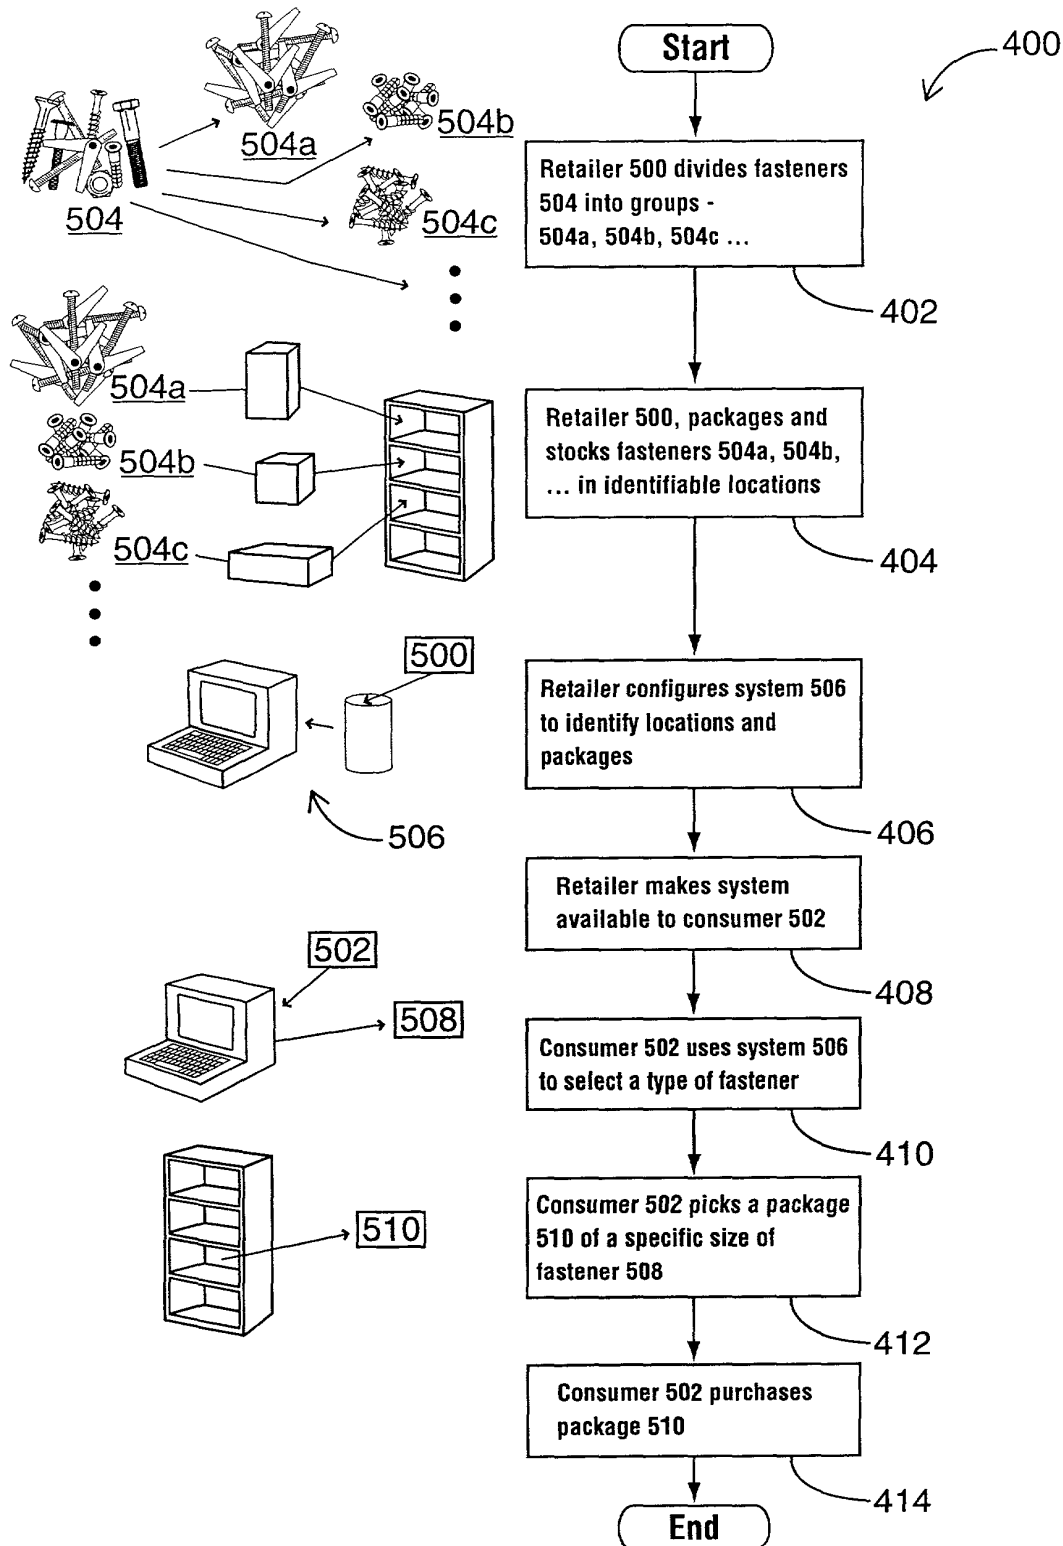


FIG 16